
Timber Frame Separating Wall Through Ground Floor

THERMAL PERFORMANCE

CHECKLIST
(TICK ALL)

☐ Install edge insulation with a minimum R-value of 1.14 m²K/W

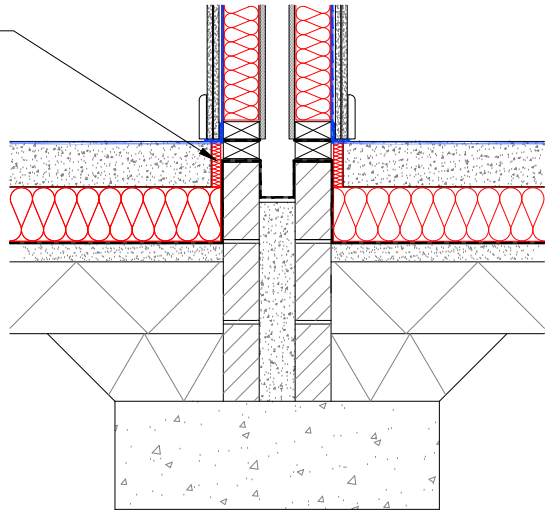

AIR BARRIER - CONTINUITY

CHECKLIST
(TICK ALL)

☐

Complying with checklist will help achieve design air permeability

GENERAL NOTES

An effective vapour control layer, which may serve as an air barrier, should be provided on the warm side of the insulation in accordance with Appendix B of Technical Guidance Document L

Refer to Technical Guidance Document B and Supplementary Guidance to TGD B for guidance on cavity barriers and fire protection of structures

Refer to Technical Guidance Document E for guidance on sound requirements

Refer to Technical Guidance Document Part C for details on radon protection

AIR BARRIER - OPTIONS

OPTION
(TICK ONE)

☐ Airtightness membrane and tapes, or

☐ Internal lining, for example, plasterboard