
E16-03: External Corner - Room in Roof Attic Truss - Hanging Post **Psi Value: 0.068 W/mK**

f Value: 0.89

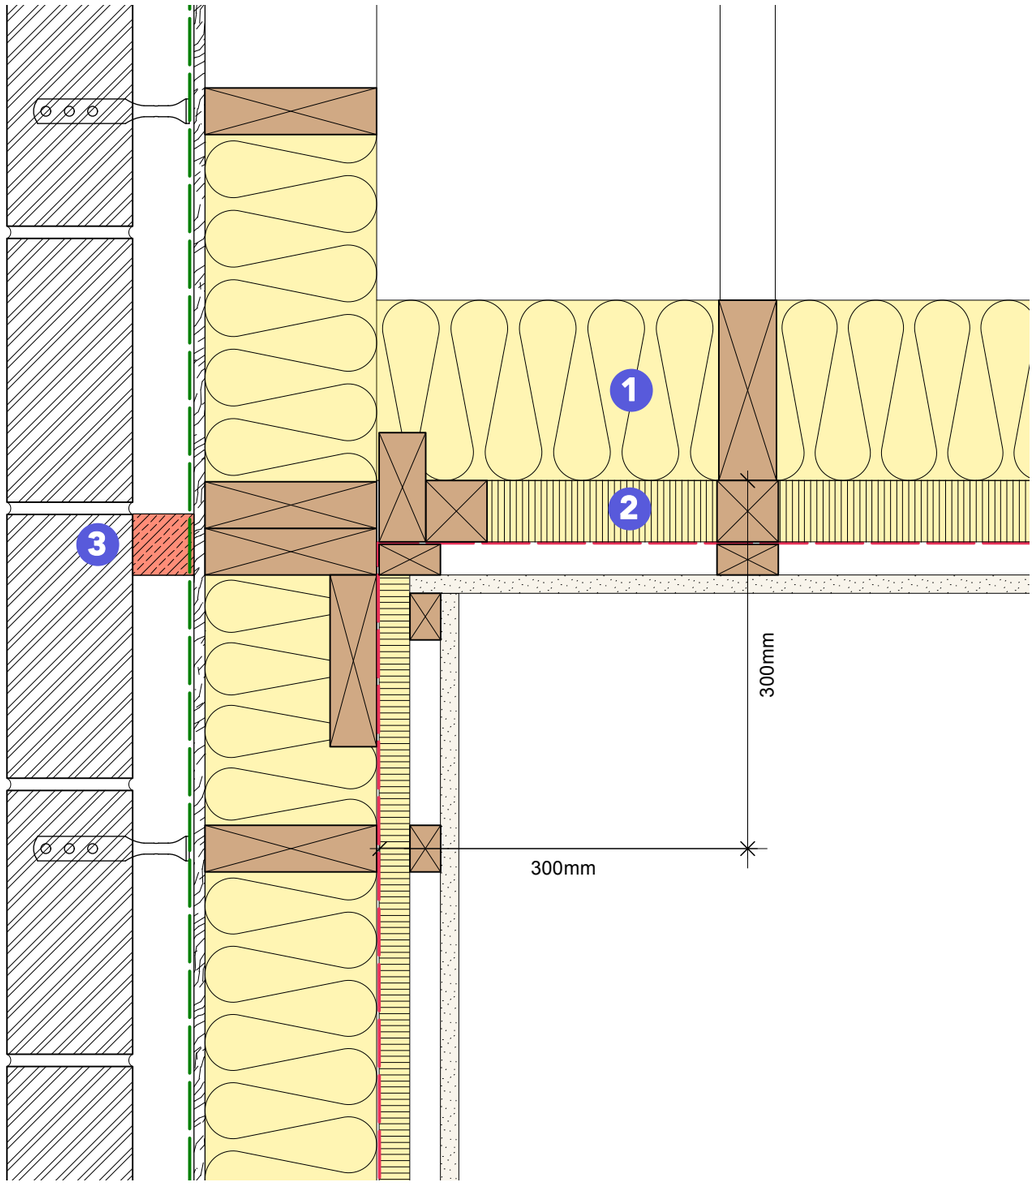

Thermal Compliance Notes

1. 150mm mineral wool insulation (0.044 W/mK) between hanging posts.
2. 50mm PIR rigid insulation (0.022 W/mK) to underside of rafters.
3. Cavity barrier.

Construction Notes

1. Membrane and VCL shown may help improve air tightness performance.

General Notes

1. The timber frame detailing arrangements shown are considered common industry practice and align with STA technical guidance and advice where required.
2. All non-timber frame construction detailing, design and specifications, are the responsibility of the Principal Designer.
3. All horizontal and vertical cavity barriers and firestops (timber, polythene sleeved or open state) are to be located and fitted in accordance with STA cavity barrier and firestopping technical guidance.
4. Brick wall ties are shown indicatively, and are subject to coursing and structural engineering project specific design, under the responsibility of the Principal Designer.